
D-720-1

STANDARD MONUMENTS AND RIGHT-OF-WAY MARKERS

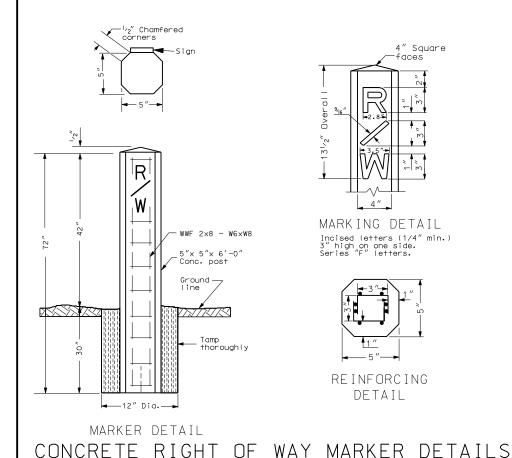

3/4" 1/8" Hole-NORTH DAKOTA 1/4 1/8" == DEPARTMENT OF 1/8" === اردا --- TRANSPORTATION DO NOT 1/2" 1/4" -- 1/2" 1/₄" → NEARBY 1/4" -- SURVEY 1/4"_**-**MONUMENT **→** 1/4" 1/8" Hole-IOLATORS SUBJECT ____ I,__" TO PROSECUTION

SIGN DETAIL

Black letters on orange background. 40 Gauge stamped aluminum plate. Baked enamel finish. Silk screen graphics. One color print. Sign shall be attached by drilling two holes in the face of the post (side Sign shall be attached facing the private owner, away from the Department of Transportation right of way). Put inserts into the holes and mount the sign with #4 vandal proof screws. Sign shall be installed 2" from top of post.

Finished Road Grade No. 7 x 31" deformed bar Surfacing 6"(Min.) Base GRADING SURFACING PROJECT PROJECT (If Disturbed) 11 11

The construction and installation of precast concrete alignment monuments and right of way markers shall conform to Section 720 of the Standard Specifications.

The markers shall be placed on the right of way line 12" from the iron pin as shown in the details. All markers shall be installed with the letter side facing the project. A 3" x 9" sign (see details on this sheet) will be attached to the back side of the markers.

Iron pins (1" x 24") will be furnished and placed by the NDDOT (or surveying consultant personnel working on highway projects) on the Right of Way line at section lines, right of way breaks, curve points, and near the mid point of each mile. The iron pins will also be placed on the centerline alignment curve points and POT's (see diagram below). The pins at the mid point can be eliminated if the curve points or right of way breaks are in the immediate vicinity.

NOTES

IRON MONUMENTS (PINS):




NORTH DAKOTA DEPARTMENT OF TRANSPORTATION REVISIONS 12-16-87 Note change 05-01-90 Steel post note 09-03-96 Sign detail 08-05-98 Revised notes 10-26-98 General revisions 12-23-98 Note Revisions 12-05-00 Add plastic R/W marker Rev. note 02-18-03 Revised notes 12-01-04 PE Stamp added 11-28-05 • Iron Monument (pin Precast Concrete Alignment Monument

KEY

□ R/W Marker

This document was originally issued and sealed by MARK S GAYDOS, Registration Number PE-4518, on 11/28/05 and the original document is stored at the North Dakota Department of Transportation

(YELLOW) INCISED R/W MARKINGS (FRONT FACE ONLY) 1/8" MIN, DEPTH SERIES "F" LETTERS MARKING DETAIL 42" 72" -COLOR: SOLID YELLOW MIN RECYCLED PLASTIC אועונעו 2" DIA. HOLE NO. 4 X 10" REBAR ANCHOR

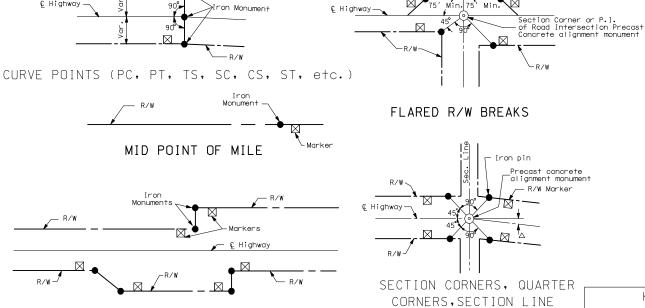

CROSSINGS, & PI's

MARKERS AT R/W BREAKS

---12″ Dia.---

MARKER DETAIL

RECYCLED PLASTIC

RIGHT OF WAY MARKER DETAILS